



Metallic Flap Valve

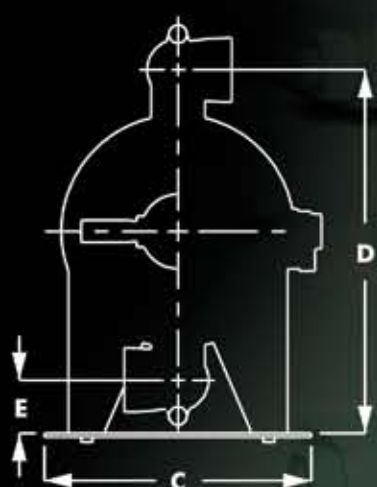

MARATHON®

Flap valve MARATHON pumps are especially recommended for liquids which are viscous or solids-laden. Flap valves allow passage of larger suspended solids than most ball valve units without damage. Various discharge porting options available. These pumps are ATEX Compliant.

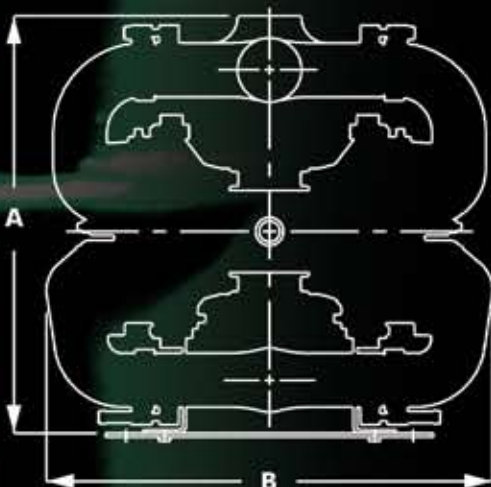

| Pump | Height inches (mm) | Width inches (mm) | Depth inches (mm) | Bottom of Base to Center line of: | | Connections |
|------------|-----------------------|----------------------|----------------------|--------------------------------------|--------------------------|-------------------|
| | | | | Suction inches (mm) | Discharge inches (mm) | |
| MP04F | 14 7/16" (367) | 11 3/4" (298) | 10 13/16" (275) | 3 3/16" (81) | 3 3/16" (81) | 1" FNPT only |
| MP10M | 19 9/16" (497) | 21 3/4" (552) | 13 5/8" (346) | 17 11/16" (449) | 2 9/16" (65) | 2" FNPT only |
| MP14F (3") | 29 1/2" (749) | 36 9/16" (929) | 16 1/4" (413) | 25 3/4" (654) | 4 1/4" (108) | 3" 125# ANSI only |
| MP14F (4") | 30 15/16" (786) | 36 9/16" (929) | 21 1/4" (540) | 26 1/2" (673) | 5" (127) | 4" 125# ANSI only |