


Metallic Ball Valve

MARATHON®

These metallic MARATHON pumps have wetted components in Aluminum, Cast Iron, Stainless Steel, and Hastelloy-C. They provide exceptional suction lift capacity for small solid materials from low to high viscosity. These pumps are ATEX Compliant.

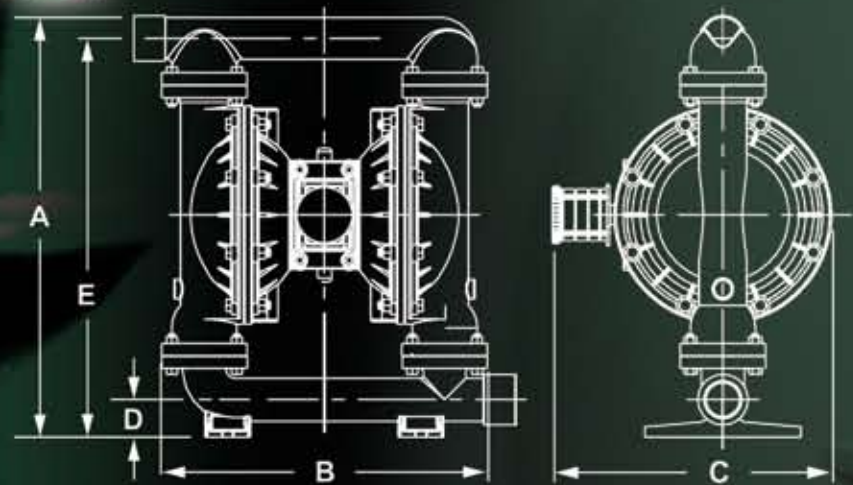

Pump	Height inches (mm)	Width inches (mm)	Depth inches (mm)	Bottom of Base to Center line of:		Connections
				Suction inches (mm)	Discharge inches (mm)	
M02	5 13/16" (148)	7 7/16" (189)	4 3/8" (111)	5/8" (16)	4 13/16" (122)	1/4" FNPT
M05 AL	11 1/2" (292)	10 1/4" (260)	8 3/4" (222)	1 5/16" (33)	11 1/2" (292)	1" MNPT - 1/2" FNPT
M05 SS	10 15/32" (278)	10 1/4" (260)	8 23/32" (203)	1 13/32" (36)	9 13/16" (249)	1" MNPT - 1/2" FNPT
M1F AL/CI	12 47/64" (323)	12 17/64" (312)	12 1/2" (318)	1 7/64" (28)	11 37/64" (294)	1" FNPT or BSP
M1F SS	12 37/32" (326)	12 17/64" (312)	12 1/2" (318)	1 7/32" (31)	11 31/32" (304)	1" FNPT or BSP
M15	21 15/32" (545)	19 21/64" (491)	13 53/64" (351)	1 29/32" (49)	20 5/16" (516)	1 1/2" FNPT or BSP
M20	26 5/16" (668)	19 29/32" (506)	14 5/64" (358)	1 7/8" (48)	24 3/4" (629)	2" FNPT or BSP